




72" Fixture—APT72-8Color-P-Finish




60" Fixture—APT60-7Color-P-Finish

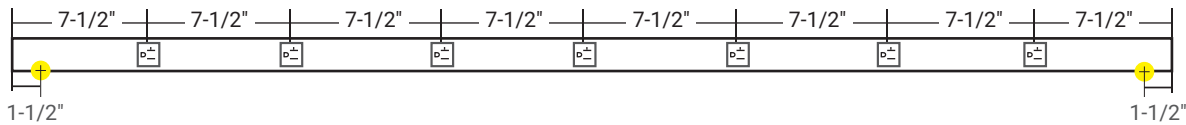


48" Fixture—APT48-5Color-P-Finish

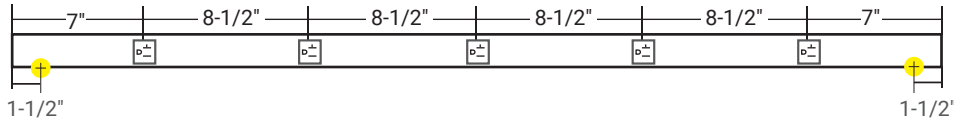


42" Fixture—APT42-5Color-P-Finish




36" Fixture—APT36-4Color-P-Finish



30" Fixture—APT30-4Color-P-Finish

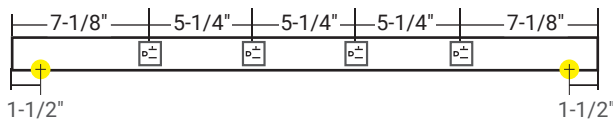


24" Fixture—APT24-4Color-P-Finish




LEFT SIDE WIRE ENTRY


**18" Fixture
APT18-3Color-P-Finish-L**



**12" Fixture
APT12-2Color-P-Finish-L**




**9" Fixture
APT9-2Color-P-Finish-L**




RIGHT SIDE WIRE ENTRY


**18" Fixture
APT18-3Color-P-Finish-R**



**12" Fixture
APT12-2Color-P-Finish-R**



**9" Fixture
APT9-2Color-P-Finish-R**



LEGEND

 = 20-amp receptacle available in Black (B), Grey (G), or White (W)

 = Knockout (all knockouts are located on the back side of fixture and are 1-1/2" from the end)

CUSTOM OPTIONS/DETAILS

- Custom lengths from 6"—92" (larger sizes will have a seam when assembled)
- 120-volt integral switch (available in Black, Grey, or White)
- Additional receptacles
- Custom receptacle/switch placement
- Receptacles must be a minimum of 1-1/2" apart (on center)
- Receptacles must be a minimum of 2" from the end. (Requires wire entry at opposite end of fixture—**knockout cannot be behind device**)
- 4-1/2" of room suggested for wire entry at knockout location
- Custom charges and additional design limitations may apply—Call Design Services at 866-848-9094 for a quote, lead time, and assistance with your custom order